
Product specification sheet

Cora Bike Rack - E3GP (Front wheel & Rear wheel in options)



Horizontal Rack Spacing

- Racks are mounted to provide floor level roll-in racking and removal of bikes
- Racks options provide support and locking for front wheel-in first or rear wheel-in first racking

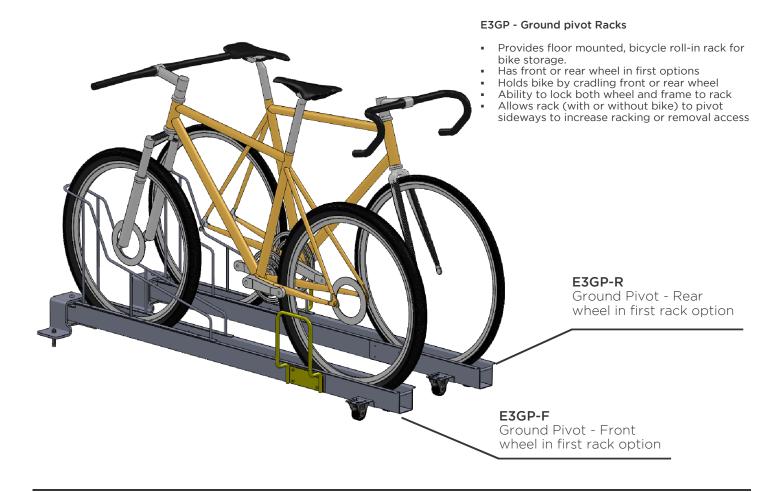

To **comply** with AS2890.3 (2015) minimum 400mm spacing between posts centres and to edge of walls or other obstructions

Product specification sheet

Cora Bike Rack - E3GP (Front wheel & Rear wheel in options)

Bike access for E3GP - pivoting rack





Racks in neutral position

Racks pivoted


Racks either side of free rack, can be pivoted, to increase access for racking or removal

Bike placed in rack

Bike is wheeled in to rack, either front or rear wheel-in first depending on rack type

Dimensions and spacing for racks

Single sided, double row layout

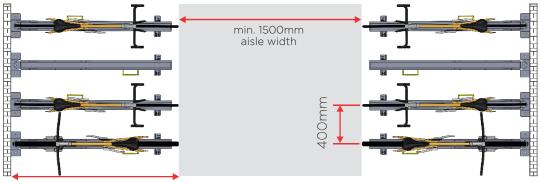

To **comply** with AS2890.3 (2015) minimum 400mm spacing between bikes,

1800mm min (Approx.) bike clearance

Double sided row rack layout





Australia's Bike Parking Experts

PH 1800 249 878 sales@cora.com.au ww.cora.com.au





