

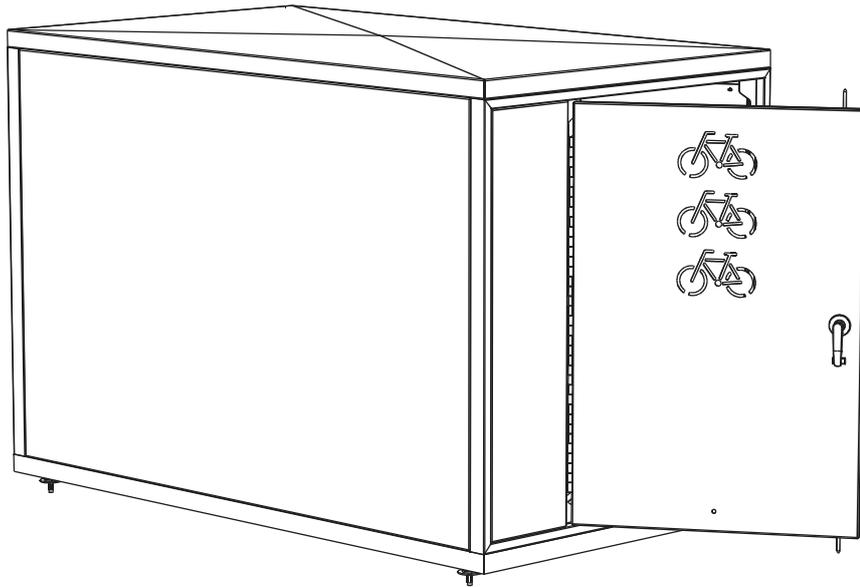


# Double Locker Installation & Assembly Instructions


## Cora Bike Rack - Double Door Bike Locker

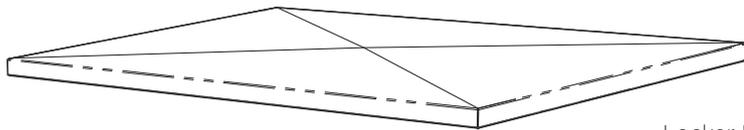


Cora - Double Door Bike Locker

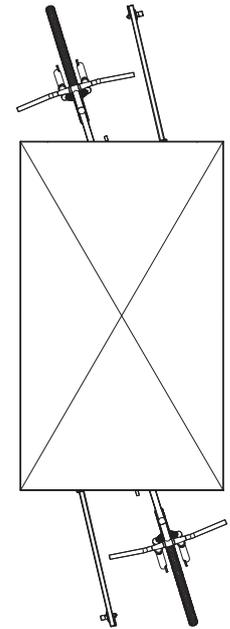


Locker Roof  
(X1 per locker)

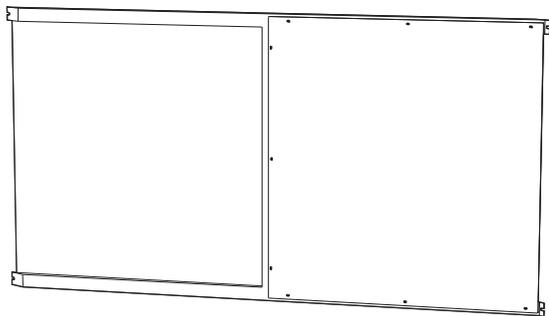

Locker internal  
divider frame and  
panels  
(X1 per locker)

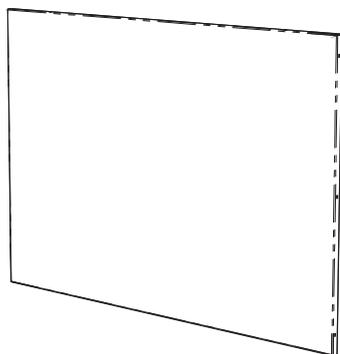

Locker side panels  
(x1 for left side,  
x1 for right side)

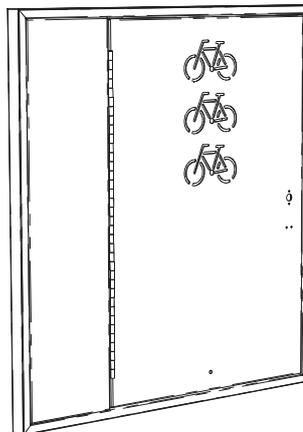

Locker door frame  
assembly  
(X2 one for each  
end of locker)



Locker base frame  
(x1 per locker, may or may not  
have levelling feet installed)




M5 Phillips head  
fasteners  
(used for all fastening  
unless noted in  
instructions)



M8 Security Screws  
(X4 per locker  
for central divider)




M10 Shear nuts  
(X4 one per  
anchor bolt)



Door mounted  
padlock loop for  
handle  
(X2 one per door)



Three point locking  
mechanism and  
handle with or  
without integrated  
key lock  
(X2 one per door)



M10 Anchor Bolts  
(X4 per base frame)




Adjustable leveling  
foot  
(x4 per base frame)

# Double Locker Installation & Assembly Instructions

## Cora Bike Rack - Double Door Bike Locker


### 1. Access and clearance around mounted lockers

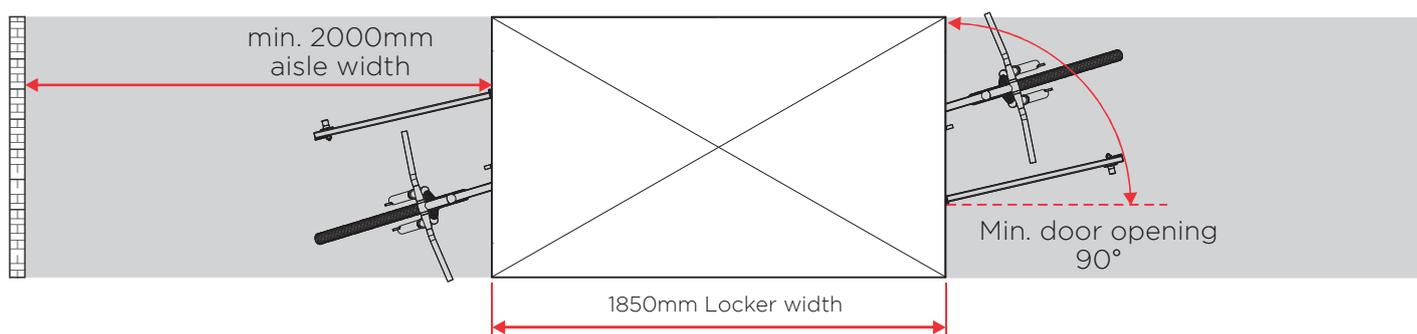

### Access dimensions around lockers


- Before mounting locker, find a suitable place that will allow for minimum spacing dimensions
- Ensure min distance of 2000mm is provided on door side of lockers to provide correct aisle space and access for bike
- Ensure minimum spacing from walls, lockers or obstructions to allow for minimum access
- In multiple locker instal, lockers may be mounted side by side with no gap

### 2. Assemble base frame

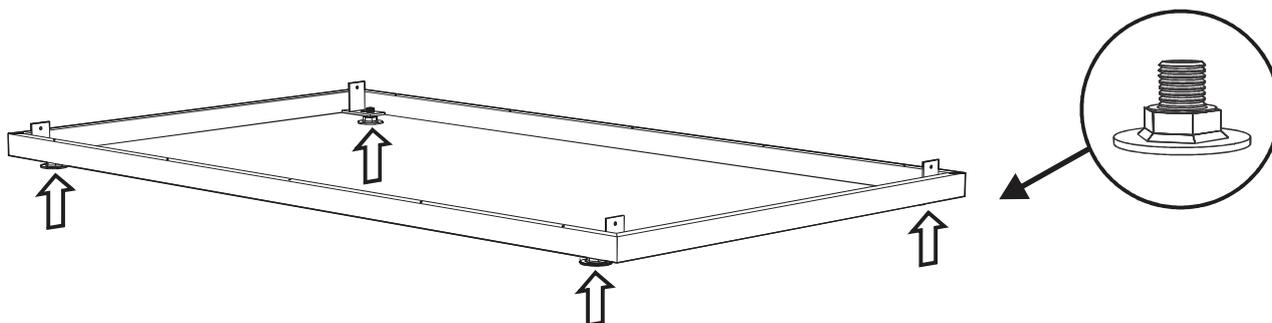

- Base frame should have one (X1) adjustable levelling foot per corner. Base frame may come with these already installed
- If base frame does not have adjustable levelling feet installed, screw in one foot per corner of frame. Feet to be screwd in from bottom of frame

### 3. Level base frame on ground at intal location

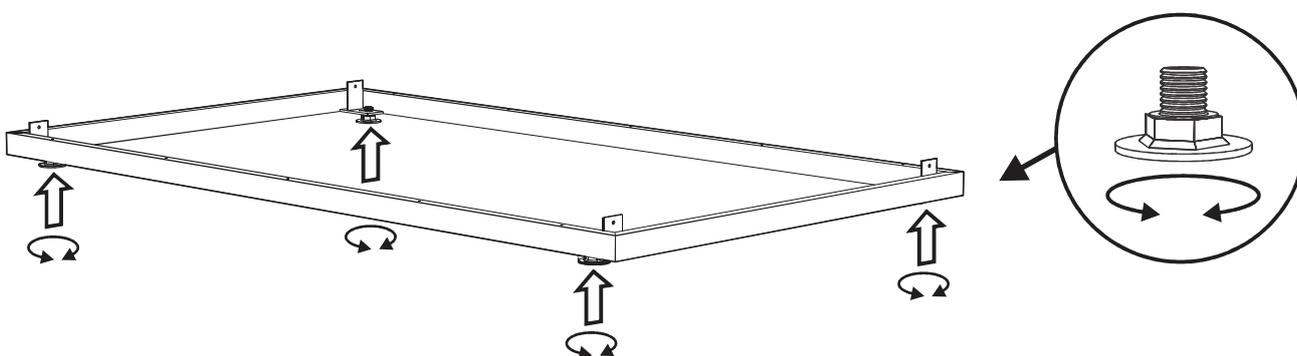


- Try to use an instal location where ground is already as flat and as unobstructed as possible (areas without bumps, dips, raised sections from roots or ground features).
- Ground type should be solid eg.: concrete, asphalt, bitumen etc.
- Level base frame by raising/ lowering corners by turning adjustable feet using spanner.
- Feet have a limited range of travel and may not accommodate all surfaces, levels or gradients
- Use spirit-level placed on top of frame, to assist in getting frame as level as possible.

**NOTE: Ensure all feet contact with ground firmly after levelling, frame cannot rock or lean at any corner, or when fastened with anchor bolts, frame will be warped and not level and will effect assembly of locker**

# Double Locker Installation & Assembly Instructions


## Cora Bike Rack - Double Door Bike Locker

### 4. Drill holes in ground for location of anchor bolts

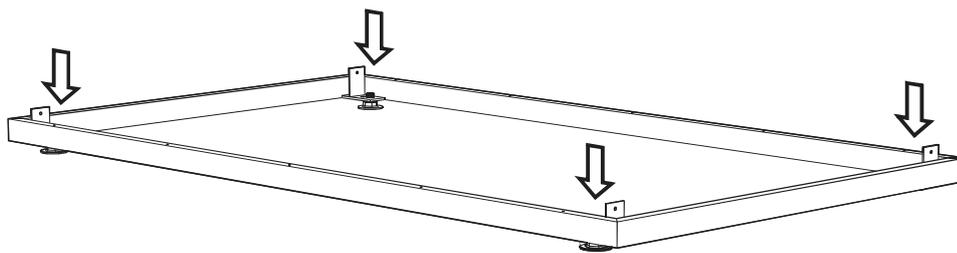

- Option 1: Leave base frame in place and drill holes for anchor bolts directly through hole in adjustable levelling feet.
- Option 2: Use holes in adjustable levelling feet to mark location of holes for anchor bolts. Mark holes while base frame is in correct position. Move frame away and drill holes
- Drill or core hole 12mm diameter and 120mm min. depth


### 5. Install Anchor bolts, fix base frame to ground

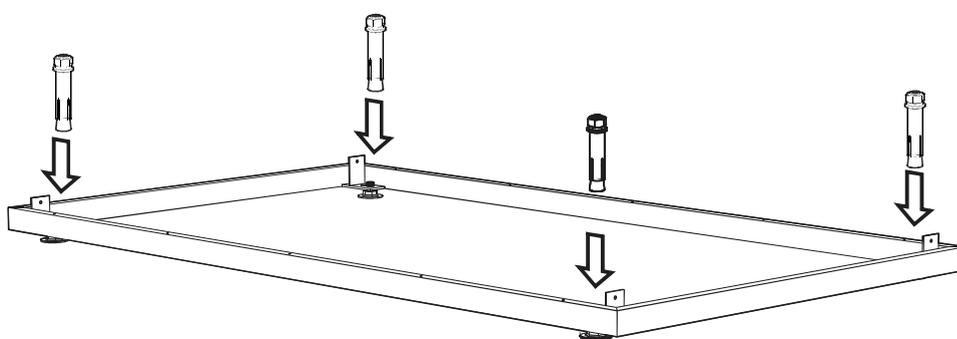

After Anchor bolt instal

- Locate frame in position with adjustable feet over drilled holes, knock anchor bolts (x4 one for each corner of frame) into ground through holes in adjustable feet.
- Check level of frame and adjust feet as required.
- Tighten anchor bolts with standard supplied nut
- After anchor bolt nut is tightened fully, install supplied shear nuts (x4 one per anchor bolt) onto top of thread
- Tighten shear nuts until head snaps off

### 6. Attach first door assembly to base frame

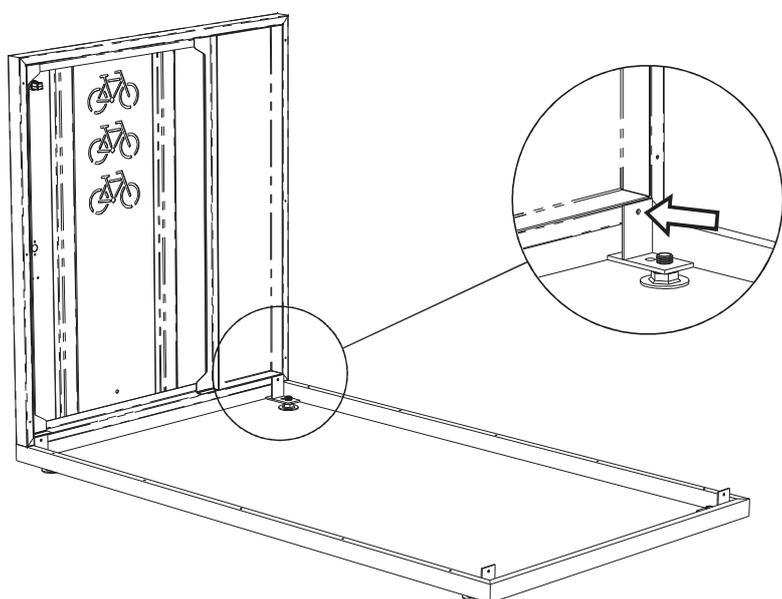


- Screw door assembly to base frame using two (x2) Phillips head screws.
- Each door assembly is fixed to ends of base frame, by fixing door assembly to outside of tabs on ends of base frame

# Double Locker Installation & Assembly Instructions



## Cora Bike Rack - Double Door Bike Locker

### 7. Attach second door assembly to base frame

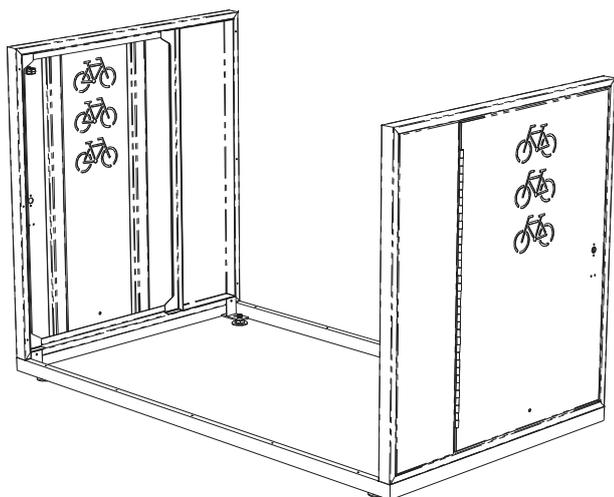


- Screw door assembly to base frame using two (x2) M5 Phillips head screws.
- Each door assembly is fixed to ends of base frame, by fixing door assembly to outside of tabs on ends of base frame

### 8. Attach side panels to base frame and door frames

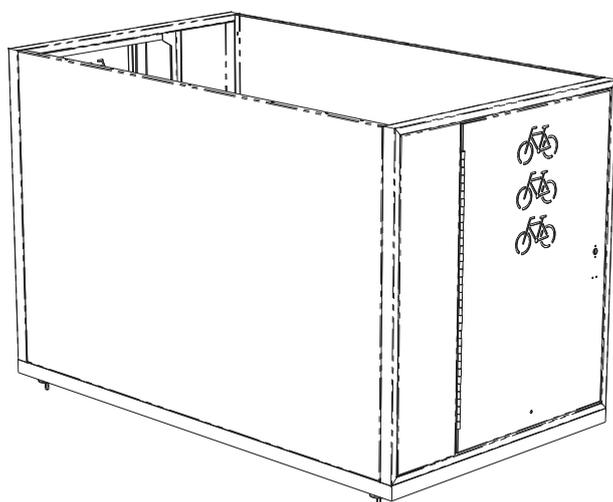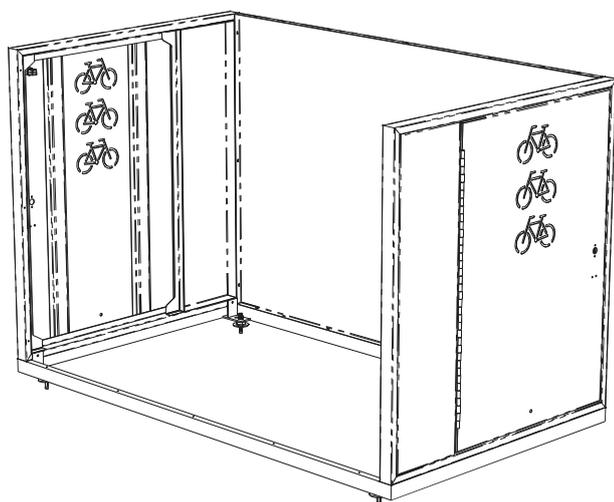

- Screw two side panels (one for each side of locker) using M5 Phillips head screws.
- Screw through bottom edge of side panels to base frame and via end edges of side panel to both door assembly frames,

### 9. Attach roof to locker

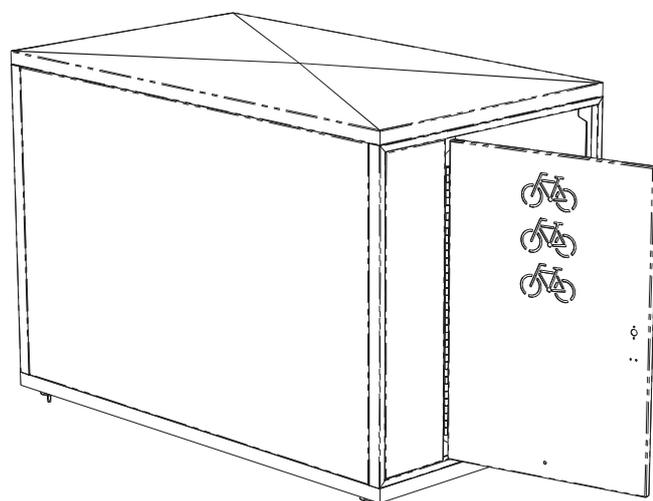


- Screw roof to locker using two M5 Phillips head screws.
- Roof is fixed via screwing from inside of locker, through top edges of both side panels into roof

# Double Locker Installation & Assembly Instructions

## Cora Bike Rack - Double Door Bike Locker


### 10. Install internal bike divider frame and panels

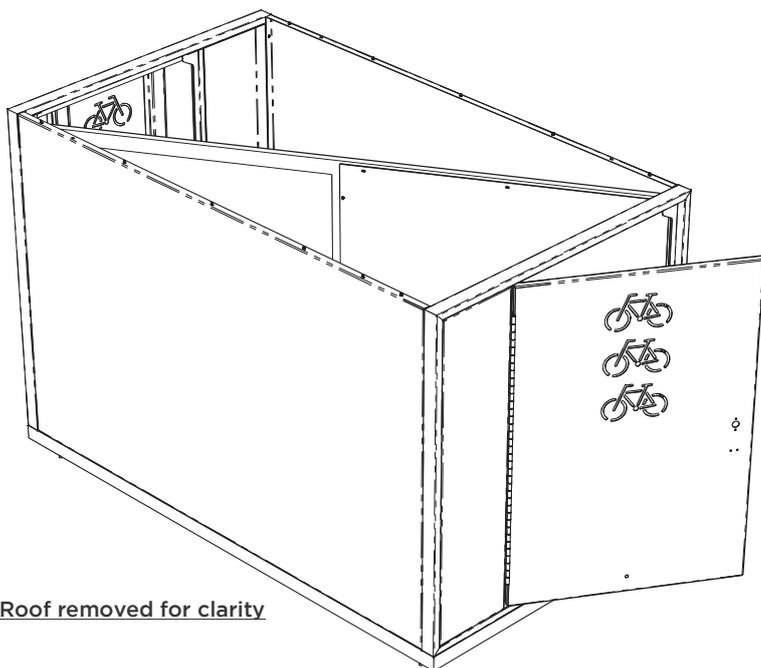

\* Roof removed for clarity

- Locker bike divider frame is fixed on angle to inside of locker using four (X4) M8 security head screws.
- Divider frame is fixed using two screws to each end of frame, fixing top and bottom of divider frame to door assembly frame
- Two flat sheet panels are fixed to divider frame using M5 Phillips head screws, done either before or after frame is installed inside locker

### 11. Lock handle and padlock loop

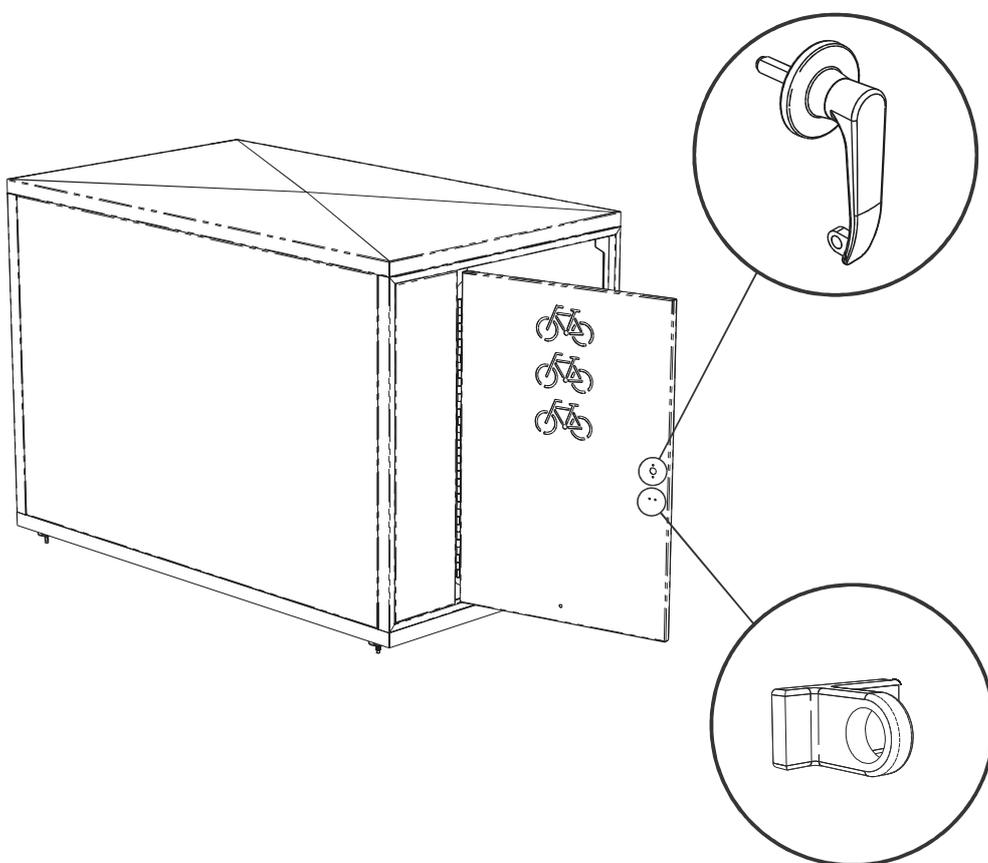


- Fix one door handle to each door (handle might be version either with or without intergrated key locking).
- Handle is assembled through front of door and secured via tightening supplied nut to threaded shaft of handle
- Ensure that flat seal is on external door face, captured between door and handle body

- Fix one padlock loop to each door
- Padlock loop fixes to external face of door via installing supplied fasteners through door and tightening
- Ensure padlock loop is installed with loop situated on left side

# Double Locker Installation & Assembly Instructions


## Cora Bike Rack - Double Door Bike Locker

### 12. Install 3 point locking mechanism

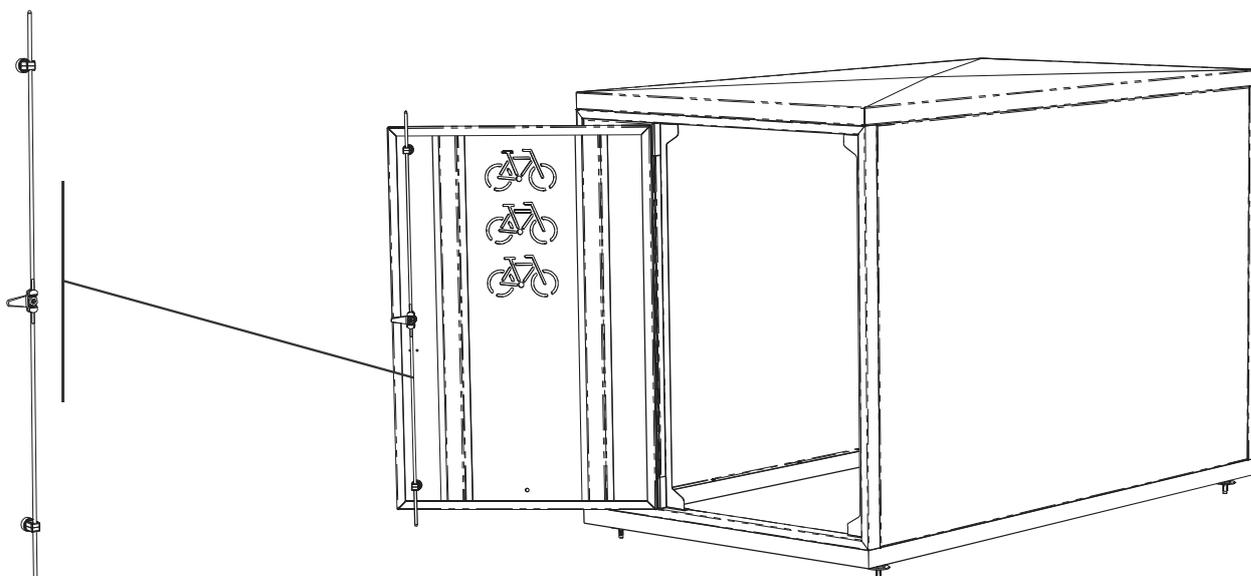

- One 3-point locking mechanism per door
- Mechanism is installed over threaded shaft of handle and secured by tightening supplied nut
- Position of main lock paw should be tuned so not to clash with door, but close door tightly.
- Two (X2) rod guides should also be screwed to inside face of each door
- Ensure rod guides are positioned to allow lock rods to travel freely without hitting inside or edges of door

Installation of the Cora Double door locker is complete

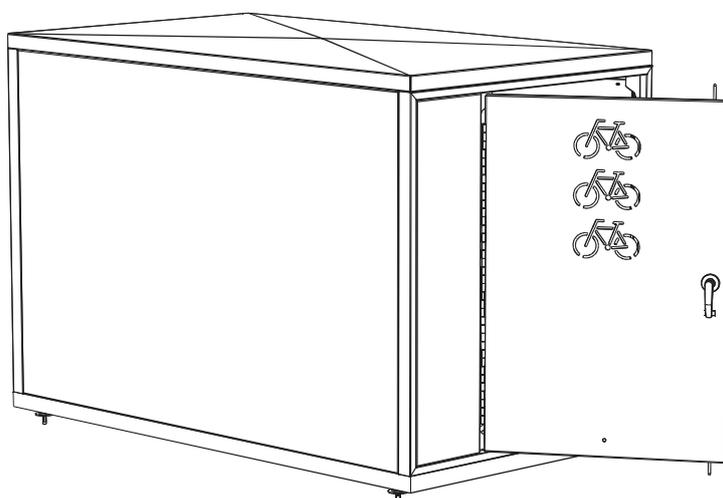

# CORA

## BIKERACK

Australia's Bike Parking Experts

PH 1800 249 878  
sales@cora.com.au  
ww.cora.com.au

